

designation	CENTRALIS indoor RTS
reference	
range	INTEO (electronics in the control point)

FUNCTIONS

Control of a Somfy motor by a RTS control or an INIS RT.

Time delay outputs : 3 min

Rolling code (16 million of possibilities)

Built-in manual security control (trip switch type, 4 times :
▼, S, ▲, S)


The programming button allows to memorize 16 RTS controls codes (individual control, group control and general control).

**TECHNICAL SPECIFICATIONS**

Box	Material	ABS
	Colour	Black
	Dimensions	57 x 53 x 38 mm
	Protection factor against solid and splashproof	IP30
Supply	nominal limits	220-240 V~ 198-255 V~
	Frequency	50 - 60 Hz
Frequency		433,42 MHz
Standard		IETS 300-220
Temperature range	Working	-5°C to +60°C
	Storing	-20°C to +70°C
Connectors		screws
Antenna		Built-in
Output relays		250 V~ 3.15 A
Fuse		3.15 A
Electromagnetic compatibility	CEI 1000-4-2	8 kV
	CEI 1000-4-3	lev III
	CEI 1000-4-4	lev III
Weight		80g
CE requirements		Yes

CODING

At each control received from a RTS control, the CENTRALIS indoor RTS knows what will be the next code (rolling code) transmitted by this RTS control.

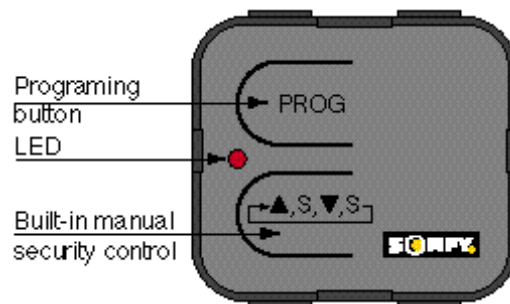

COMPATIBILITIES AT THE 17/02/99


IN THE RANGE

- CENTRALIS RTS
- CHRONIS RTS
- TELIS 1 RTS
- TELIS 4 RTS
- INIS RT

IN THE OTHER RANGES

- SL7070
- SL7070 GmbH
- SL2070

WIRING

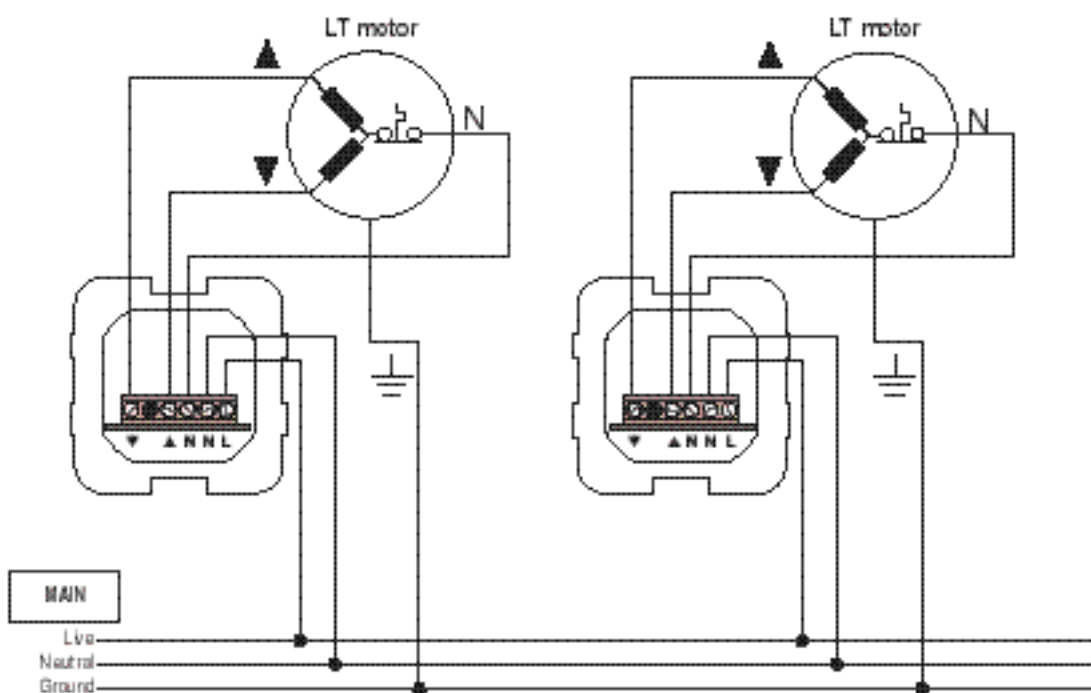

BE

QUALITY

GMD